

Keyscan K-SKPR

Versatile smartcard reader and keypad



*Dual security,
with access
credential
and/or PIN*

Smart dual layer security with K-SKPR 13.56MHz smartcard & keypad reader

For use with any Keyscan Access Control System


The Keyscan K-SKPR is a high frequency reader and keypad offering users convenience and enhanced security that only a smartcard reader and credential combination can offer. It features built-in support for smartcard security and encryption as well as an electronic “heartbeat” to detect any type of tamper or malfunction. K-SKPR is an ideal choice for new Keyscan installations requiring cost-effective high-frequency readers and credentials. K-SKPR readers will also function in existing Keyscan environments using K-SMART readers.

- Designed to function with Keyscan K-SECURE 1K and 4K smartcards, plus Keyscan K-SF-1K and K-TX2-1K RF transmitters
- Also functions with ISO 14443 type credentials for CSN only
- Suitable for indoor and outdoor use
- Keypad labeled with alpha-numeric identifiers
- Pass-thru Wiegand output standard
- PIN entry outputs an 8-bit burst
- Up to 6” read range
- Epoxy encased electronics provide reliable operation
- Conveniently mounts to a single gang wall box
- Buttons provide audible feedback
- Blue backlighting for easy use in low light areas
- Raised ‘pip’ on the 5 key for visually impaired individuals
- Limited lifetime warranty

Features and Benefits:

- 1 Ideal for applications that require enhanced security by enforcing both card presentation and PIN entry for secured areas
- 2 For applications where cards are not issued, users may be assigned a temporary or permanent PIN with designated access privileges
- 3 Mounts on a single gang electrical box
- 4 Membrane style keypad surface prevents malfunction due to dust and debris accumulation
- 5 Keypad surface does not leave finger print smudges

Applications:

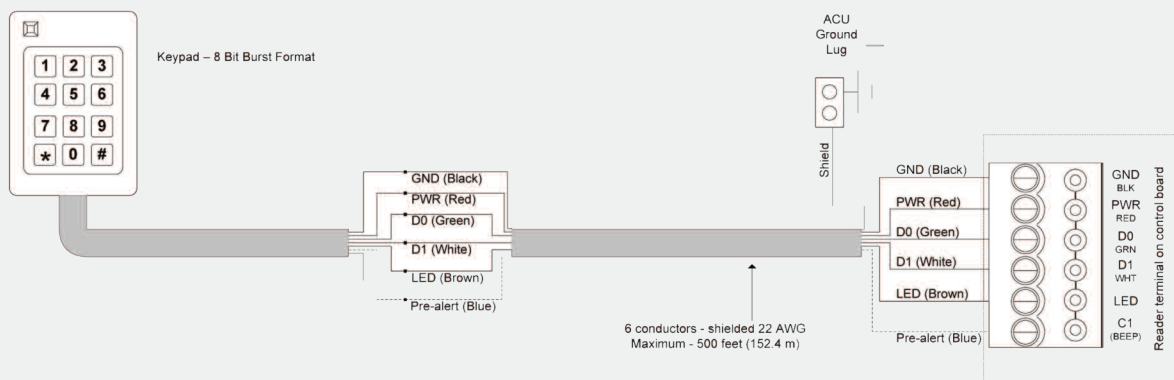

Specifications:

Size	4.5625" x 3" x .75" (11.6cm x 7.6cm x 2cm)	Operating Temperature	- 40° C to 65° C (- 40° F to 149° F)
Read Range	Mounted on non-metal - up to 6" (15.2 cm) Mounted on Metal - up to 4" (10.2 cm)	Cable	Wiegand interface 500 feet (152 meters) 6 conductor shielded 22 AWG
Input Voltage	12 VDC operation	Indoor/Outdoor Design	Secured in a rugged, tamper-resistant epoxy potting designed to withstand harsh weather conditions Easily installed in any location
Typical Current Draw	Nominal draw is 160mA		

Electronic Access & Data (EAD)
 Keyscan Inc.
 901 Burns St, E, Whitby, Ontario
 Canada L1N 0E6

1 888 539-7226 | www.keysca.ca

KKT2058 2016-02